


# FELLONI

Felloni DMX Dimming Box  
Manual

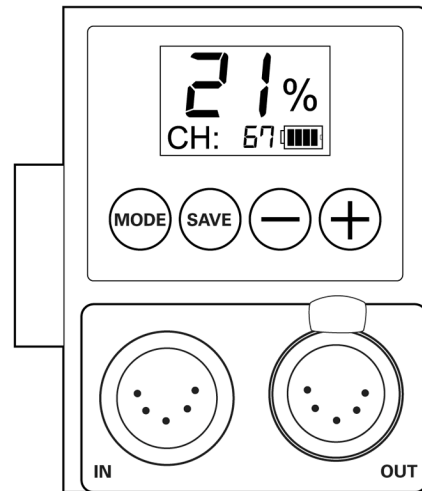

TP-LONI-DIM-DMX

### Safety Tips

Please read carefully these instructions before use. Follow these instruction to avoid damage of your TECPRO product and to avoid harming yourself or others. Keep these safety instructions with this product.



**TECPRO®**

**Dedo Weigert Film GmbH**  
Karl-Weinmair-Str. 10  
80807 München / Germany  
Tel.: 0049 - 89 - 356 16 01  
Fax: 0049 - 89 - 356 60 86  
info@dedoweigertfilm.de  
www.dedoweigertfilm.de



### Warning

To prevent fire or electric hazard do not expose the dimmer to rain or humidity

### Safety Notes

1. To use with Tecpro Felloni Light Heads only! This module is compatible with all currently available Felloni models.
2. If you notice an unusual smell or smoke switch off the lamp immediately and disconnect it from power
3. Do not disassemble the dimmer box. Touching internal parts can result in injuries. In the event of malfunction hand over the dimmer to a trained technician.
4. Do not expose the dimmer to water or fog.





### Cleaning

Please use dry and soft cloth to clean the lamp. For removing dirt use a cloth dipped shortly in neutral liquid. Clean up with a dry cloth immediately afterwards. Do not use aggressive liquids!



### A The Elements

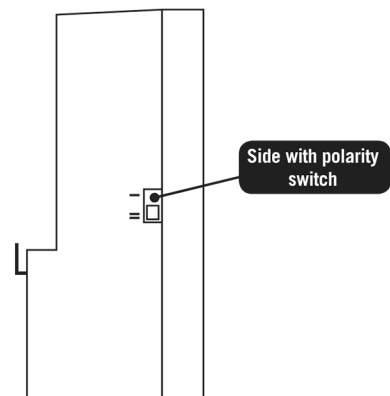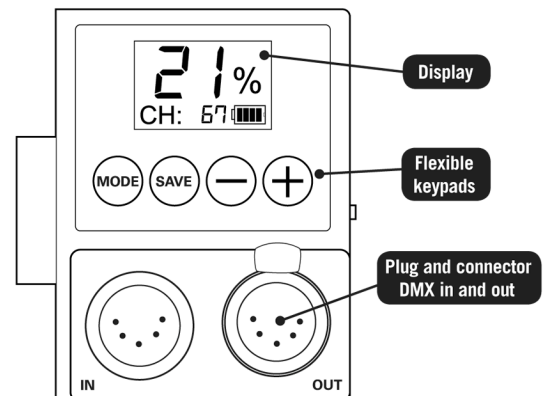

**B To start:**

1. Plug in this module instead of the standard module.
2. Power up the light head.
3. Set polarity switch (right side) to position II for compatibility with the DMX standard in Europe and U.S.A.
4. Press the „Mode“ button for about 5 seconds
5. The blinking display shows



for lightheads with single color



for bicolor Felloni




for dual angle light heads

6. Change the display according to the type of lamp you want to control with the dimming box by pressing the - / + buttons
7. Press „Save“ for storing the setting and switching to set the channels
8. In big letters „C 1“ indicate the setting for dimming the light. In the lower line will be visible the number of the selected DMX channel for this feature
9. Set the channel by pressing - / +
10. Press „Save“
11. „C 2“ will show up if you have choosen CCt for Bicolor or Ang for dual angle bevore. In the lower line is now the DMX channel number for the choosen special feature (colour temperature or beam angle).
12. Set the channel by pressing -/+
13. Press „Save“


**C For use as handheld controller without DMX signal:**

To dimm the light use the + / - buttons. The display shows the intensity as percentage. After having adjusted the intensity press the save button, otherwise the setting will switch back to the last value.

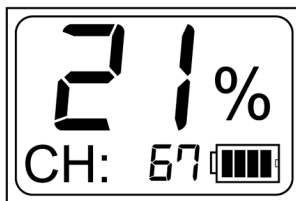

To change color or angle with lightheads who are bicolor or dual angle: First set the type of lamp according to the first steps as shown before including setting DMX channels.

For changing color or angle press the „Mode“ button only a short time. The Display shows now a Number without the percentage symbol. 0 equals 3200 K color temperature, 100 equals 5600 K. Press save to work with the setting.

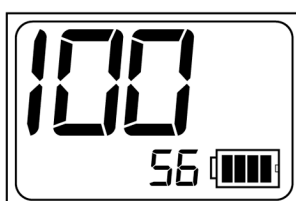

The small number in the bottom line shows the choosen DMX channel.