

Fluid Heads



Camgear provides a wide range of high quality fluid heads to video professionals, from lightweight DV&HDV to heavy studio cameras and film cameras.

All Camgear fluid heads are equipped with graded drag system and counterbalance system which ensures professionals fast cameras setup and easy operation.

It provides frictionless operation and stable and reliable performance over years against the extreme environment.

Working closely with professionals and keeping eyes on the marketing trend, Camgear always try to improve or upgrade their fluid heads, even the proven models. We continuously develop new products to bring more satisfaction to our customers.


DV6P



Specification

Model Number	DV6P
Maximum Payload	10 kgs/22 lbs
Counterbalance Range	0-9 kgs/0-19.8 lbs(at C.O.G 50mm)
Camera Platform Type	Mini Euro Plate
Sliding Range	60 mm/2.36 in
Camera Plate	1/4" screw & Pin
Counterbalance System	8 steps (1-8)
Tilt & Pan Drag	4 steps (1-4)
Tilt & Pan Range	Tilt: +90/-75° / Pan: 360°
Temperature Range	-40°C to +60°C/-40 to +140°F
Levelling Bubble	Yes
Weight	2.2 kgs/4.85 lbs
Bowl Diameter	75 mm

- ◆ Real professional drag performance, selectable 4 positions pan & tilt drag including zero position, offer operators the silky smooth movement and precise framing and ensure fast change of drag.
- ◆ Selectable 8 position counterbalance system including zero position gives the operator much fine adjustment for the cameras.
- ◆ With leveling bubble.
- ◆ Ideal for DSLR configuration and lightweight DV&HDV camcorder.
- ◆ 75mm ball leveling
- ◆ Equipped with mini Euro plate quick release system, which enables faster setup of camera.

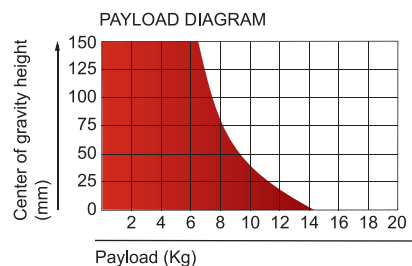

Accessories



Pan Bar PB-1



Telescopic Pan Bar PB-4



Wedge Plate WP-2



Bowl Clamp BC-2

► Tripod System ► 75mm ► HDV/DSLR

DV6P AL GS75

Specification

Weight	6.72 kgs/14.8 lbs
Height Range	0.55-1.64 m/21.7-64.6 in
Transport Length	0.85 m/33.5 in
Section	2 Stage

System Configuration

DV6P Fluid Head
T75/AL2 Two-Stage Aluminium Tripod
PB-1 Pan Bar
GS-2 Ground Spreader
SB-1 Soft Bag



DV6P CF GS75

Specification

Weight	5.90 kgs/13.0 lbs
Height Range	0.55-1.64 m/21.7-64.6 in
Transport Length	0.85 m/33.5 in
Section	2 Stage

System Configuration

DV6P Fluid Head
T75/CF2 Two-Stage Carbon Fiber Tripod
PB-1 Pan Bar
GS-2 Ground Spreader
SB-1 Soft Bag



DV6P AL MLS75

Specification

Weight	7.16 kgs/15.8 lbs
Height Range	0.64-1.64 m/25.2-64.6 in
Transport Length	0.85 m/33.5 in
Section	2 Stage

System Configuration

DV6P Fluid Head
T75/AL2 Two-Stage Aluminium Tripod
PB-1 Pan Bar
MSP-2 Mid Level Spreader
RF-1 Rubber Feet
SB-1 Soft Bag



DV6P CF MLS75

Specification

Weight	6.34 kgs/14.0 lbs
Height Range	0.64-1.64 m/25.2-64.6 in
Transport Length	0.85 m/33.5 in
Section	2 Stage

System Configuration

DV6P Fluid Head
T75/CF2 Two-Stage Carbon Fiber Tripod
PB-1 Pan Bar
MSP-2 Mid Level Spreader
RF-1 Rubber Feet
SB-1 Soft Bag



Optional Accessories



Mid Level
Spreader MSP-2



Rubber Feet RF-1



Ground Spreader GS-2



Tripod Adapter TA-2



Dolly S



Dolly L