

Fluid Heads



Camgear provides a wide range of high quality fluid heads to video professionals, from lightweight DV&HDV to heavy studio cameras and film cameras.

All Camgear fluid heads are equipped with graded drag system and counterbalance system which ensures professionals fast cameras setup and easy operation.

It provides frictionless operation and stable and reliable performance over years against the extreme environment.

Working closely with professionals and keeping eyes on the marketing trend, Camgear always try to improve or upgrade their fluid heads, even the proven models. We continuously develop new products to bring more satisfaction to our customers.

► Fluid Head ► 75mm ► HDV/DSLR


MARK 4



Specification

Model Number	MARK 4
Maximum Payload	7 kgs/15.4 lbs
Counterbalance Range	0-7 kgs/0-15.4 lbs(at C.O.G 50mm)
Camera Platform Type	Sliding camera plate
Sliding Range	104 mm/4.1 in
Camera Plate	1/4" 3/8" screw & Pin
Counterbalance System	6 steps (1-6)
Tilt & Pan Drag	4 steps (1-4)
Tilt & Pan Range	Tilt: +90/-75° / Pan: 360°
Temperature Range	-40°C to +60°C/-40 to +140°F
Levelling Bubble	Yes
Weight	1.42 kgs/3.13 lbs
Bowl Diameter	75 mm

- ◆ Real professional drag performance, selectable 4 positions pan & tilt drag including zero position, offer operators the silky smooth movement and precise framing.
- ◆ Selectable 6 position counterbalance system including zero position for upto 7kgs/15.4lbs payload.
- ◆ With leveling bubble.
- ◆ Ideal for DSLR configuration and lightweight DV&HDV camcorder.
- ◆ Spare camera screws are placed on the head.
- ◆ 75mm ball leveling.

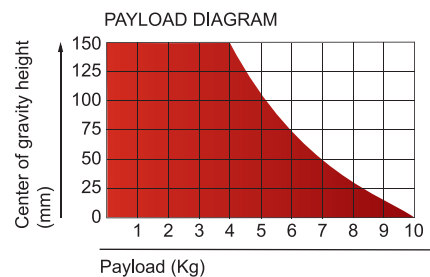

Accessories



Pan Bar PB-MARK



Sliding Plate SP-MARK

► Tripod System ► 75mm ► HDV/DSLR

MARK4 MS AL

Specification

Weight	4.5 kgs/9.92 lbs
Height Range	0.79-1.69 m/31.1-66.5 in
Transport Length	0.84 m/33 in
Section	2 Stage

System Configuration

MARK4 Fluid Head
MARK AL/MS2 2-Stage Aluminium Tripod
PB-MARK Pan Bar
Mid-Level Spreader
SB-MARK Soft Bag



MARK4 MS CF

Specification

Weight	3.9 kgs/8.6 lbs
Height Range	0.79-1.69 m/31.1-66.5 in
Transport Length	0.84 m/33 in
Section	2 Stage

System Configuration

MARK4 Fluid Head
MARK CF/MS2 2-Stage Carbon Fiber Tripod
PB-MARK Pan Bar
Mid-Level Spreader
SB-MARK Soft Bag



MARK4 GS AL

Specification

Weight	4.7 kgs/10.36 lbs
Height Range	0.57-1.74 m/22.4-68.5 in
Transport Length	0.87 m/34.2 in
Section	2 Stage

System Configuration

MARK4 Fluid Head
MARK AL/GS2 2-Stage Aluminium Tripod
PB-MARK Pan Bar
GS-MARK Ground Spreader
SB-MARK Soft Bag



MARK4 GS CF

Specification

Weight	4.1 kgs/9 lbs
Height Range	0.57-1.74 m/22.4-68.5 in
Transport Length	0.87 m/34.2 in
Section	2 Stage

System Configuration

MARK4 Fluid Head
MARK CF/GS2 2-Stage Carbon Fiber Tripod
PB-MARK Pan Bar
GS-MARK Ground Spreader
SB-MARK Soft Bag



Optional Accessories



Tripod Adapter TA-2



Ground Spreader GS-MARK



Dolly S



Dolly L