

Fluid Heads



Camgear provides a wide range of high quality fluid heads to video professionals, from lightweight DV&HDV to heavy studio cameras and film cameras.

All Camgear fluid heads are equipped with graded drag system and counterbalance system which ensures professionals fast cameras setup and easy operation.

It provides frictionless operation and stable and reliable performance over years against the extreme environment.

Working closely with professionals and keeping eyes on the marketing trend, Camgear always try to improve or upgrade their fluid heads, even the proven models. We continuously develop new products to bring more satisfaction to our customers.


V20S



Specification

Model Number	V20S
Maximum Payload	25kgs/55.1 lbs
Counterbalance Range	0-24 kgs/0-52.9 lbs(at C.O.G 125mm)
Camera Platform Type	Mini Euro Plate
Sliding Range	70 mm/2.75 in
Camera Plate	1/4" and 3/8" screw
Counterbalance System	10 steps (1-8 & 2 adjusting lever)
Tilt & Pan Drag	8 steps (1-8)
Tilt & Pan Range	Tilt: +90/-75° / Pan: 360°
Temperature Range	-40°C to +60°C/-40 to +140°F
Levelling Bubble	Illuminated Leveling Bubble
Weight	3.2 kgs/7.0 lbs
Bowl Diameter	100 mm

- ◆ Real professional drag performance, selectable 8 positions pan & tilt drag including zero position, offer operators the silky smooth movement and precise framing.
- ◆ Selectable 10 position counterbalance for ENG cameras. Thank to newly featured zero position, it can support the lightweight ENG camera as well.
- ◆ With self-illuminating leveling bubble.
- ◆ Ideal for the ENG cameras from XDCAM to P2HD with low or high profile configuration.
- ◆ 100mm bowl head, compatible with all 100mm tripods on market.
- ◆ Equipped with mini Euro plate quick release system, which enables faster setup of camera.

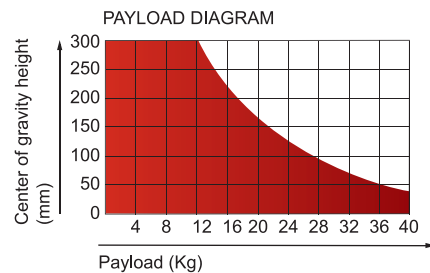

Accessories



Pan Bar PB-1



Telescopic Pan Bar PB-4



Wedge Plate WP-3



Bowl Clamp BC-2

▶ Tripod System ▶ 100mm ▶ ENG

V20S AL GS100

Specification

Weight	8.6 kgs/18.9 lbs
Height Range	0.61-1.70 m/24.0-66.9 in
Transport Length	0.88 m/34.6 in
Section	2 Stage

System Configuration

V20S Fluid Head
 ENG/AL2 Two-Stage Aluminium Tripod
 PB-1 Pan Bar
 GS-2 Ground Spreader
 SB-1 Soft Bag



V20S CF GS100

Specification

Weight	8.1 kgs/17.8 lbs
Height Range	0.61-1.70 m/24.0-66.9 in
Transport Length	0.88 m/34.6 in
Section	2 Stage

System Configuration

V20S Fluid Head
 ENG/CF2 Two-Stage Carbon Fiber Tripod
 PB-1 Pan Bar
 GS-2 Ground Spreader
 SB-1 Soft Bag



V20S AL MLS100

Specification

Weight	9 kgs/19.8 lbs
Height Range	0.69-1.66 m/27.2-65.4 in
Transport Length	0.88 m/34.6 in
Section	2 Stage

System Configuration

V20S Fluid Head
 ENG/AL2 Two-Stage Aluminium Tripod
 PB-1 Pan Bar
 MSP-2 Mid Level Spreader
 RF-1 Rubber Feet
 SB-1 Soft Bag



V20S CF MLS100

Specification

Weight	8.5 kgs/18.7 lbs
Height Range	0.69-1.66 m/27.2-65.4 in
Transport Length	0.88 m/34.6 in
Section	2 Stage

System Configuration

V20S Fluid Head
 ENG/CF2 Two-Stage Carbon Fiber Tripod
 PB-1 Pan Bar
 MSP-2 Mid Level Spreader
 RF-1 Rubber Feet
 SB-1 Soft Bag



Optional Accessories



Mid Level Spreader MSP-2



Rubber Feet RF-1



Ground Spreader GS-2



Tripod Adapter TA-2



Dolly L