

Fluid Heads



Camgear provides a wide range of high quality fluid heads to video professionals, from lightweight DV&HDV to heavy studio cameras and film cameras.

All Camgear fluid heads are equipped with graded drag system and counterbalance system which ensures professionals fast cameras setup and easy operation.

It provides frictionless operation and stable and reliable performance over years against the extreme environment.

Working closely with professionals and keeping eyes on the marketing trend, Camgear always try to improve or upgrade their fluid heads, even the proven models. We continuously develop new products to bring more satisfaction to our customers.


V25P



Specification

Model Number	V25P
Maximum Payload	32 kgs/0-70.5 lbs
Counterbalance Range	0-29 kgs/0-63.9 lbs(at C.O.G 125mm)
Camera Platform Type	Mini Euro Plate
Sliding Range	120 mm/4.72 in
Camera Plate	1/4" and 3/8" screw
Counterbalance System	10 steps (1-8 & 2 Adjusting Levers)
Tilt & Pan Drag	8 steps (1-8)
Tilt & Pan Range	Tilt: +90/-75° / Pan: 360°
Temperature Range	-40°C to +60°C/-40 to +140°F
Levelling Bubble	Illuminated Leveling Bubble
Weight	5.6 kgs/12.3 lbs
Bowl Diameter	100 mm

- ◆ Selectable 8 steps pan & tilt drag including 0 position, offer operators silky smooth movement and precise motion tracking.
- ◆ Selectable 10 position counterbalance, thank to newly added lever adjusting position, it can support the lightweight ENG camera and offer more fine adjustment for the cameras to reach the perfect balance.
- ◆ Perfect solution for EFP and field-based HD production and studio application. It supports most portable broadcast cameras and camcorders in heavy configuration and studio applications with teleprompter or compact studio lens.
- ◆ Quick release Euro plate enables faster setup of camera.

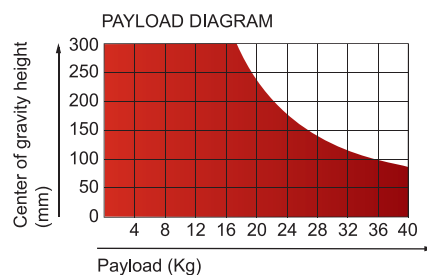

Accessories



Telescopic Pan Bar PB-2



Wedge Plate WP-4



Bowl Clamp BC-2

► Tripod System ► 100mm ► EFP/ENG

V25P EFP GS100

Specification

Weight	11.46 kgs/25.3 lbs
Maximum Height	1.78 m/70.1 in
Minimum Height	0.73 m/28.7 in
Transport Length	0.96 m/37.8 in
Section	2 Stage

System Configuration

V25P Fluid Head

EFP100/CF2 Two-Stage Carbon Fiber Heavy-Duty EFP Tripod
Two PB-2 Telescopic Pan Bar (Left & Right)

GS-2 Ground Spreader

SB-3 Travelling Tripod Bag



V25P EFP MLS100

Specification

Weight	11.02 kgs/24.3 lbs
Maximum Height	1.73 m/68.1 in
Minimum Height	0.76 m/29.9 in
Transport Length	0.96 m/37.8 in
Section	2 Stage

System Configuration

V25P Fluid Head

EFP100/CF2 Two-Stage Carbon Fiber Heavy-Duty EFP Tripod
Two PB-2 Telescopic Pan Bar (Left & Right)

MSP-2 Mid Level Spreader & RF-1 Rubber Feet

SB-3 Travelling Tripod Bag



Optional Accessories



Mid Level
Spreader MSP-2



Rubber Feet RF-1



Ground Spreader GS-2



Heavy-Duty
Ground Spreader GS-2



Tripod Adapter TA-2



Dolly L