

Fluid Heads



Camgear provides a wide range of high quality fluid heads to video professionals, from lightweight DV&HDV to heavy studio cameras and film cameras.

All Camgear fluid heads are equipped with graded drag system and counterbalance system which ensures professionals fast cameras setup and easy operation.

It provides frictionless operation and stable and reliable performance over years against the extreme environment.

Working closely with professionals and keeping eyes on the marketing trend, Camgear always try to improve or upgrade their fluid heads, even the proven models. We continuously develop new products to bring more satisfaction to our customers.


V35P



Specification

Model Number	V35P
Maximum Payload	45 kgs/99 lbs
Counterbalance Range	0-42 kgs/0-92.6 lbs(at C.O.G 125mm)
Camera Platform Type	Mini Euro Plate
Sliding Range	120 mm/4.72 in
Camera Plate	1/4" and 3/8" screw
Counterbalance System	11 steps (1-8 & 3 Adjusting Levers)
Tilt & Pan Drag	8 steps (1-8)
Tilt & Pan Range	Tilt: +90/-75° / Pan: 360°
Temperature Range	-40°C to +60°C/-40 to +140°F
Levelling Bubble	Illuminated Leveling Bubble
Weight	7.03 kgs/16.1 lbs
Bowl Diameter	150 mm

- ◆ Selectable 8 positions pan & tilt drag including zero position, offer operators the silky smooth movement, precise motion tracking and shake-free shot.
- ◆ Selectable 11 position counterbalance, thank to newly featured 3 added position, it can do much finer adjustment for the cameras to reach the perfect balance.
- ◆ Equipped the assembly lock mechanism, which ensures safe setup of equipment.
- ◆ Perfect solution for EFP and HD production, studio application with teleprompter or compact studio lens, 3D rig and outside broadcasting application with compact studio lens.
- ◆ Equipped with mini Euro plate quick release system, which enables faster setup of camera.

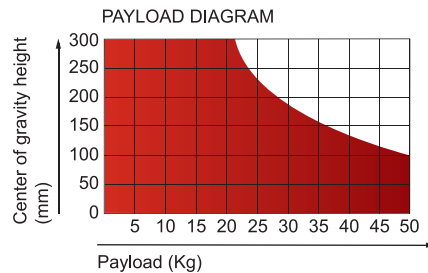

Accessories



Telescopic Pan Bar PB-2



Wedge Plate WP-5



Bowl Clamp BC-2

▶ Tripod System ▶ 100mm ▶ EFP/ENG

V35P EFP GS150

Specification

Weight	13.24 kgs/29.2 lbs
Maximum Height	1.83 m/72 in
Minimum Height	0.75 m/29.5 in
Transport Length	0.99 m/39 in
Section	2 Stage

System Configuration

V35P Fluid Head
 EFP150/CF2 Two-Stage Carbon Fiber Heavy-Duty EFP Tripod
 Two PB-2 Telescopic Pan Bar (Left & Right)
 GS-2 Ground Spreader
 SB-3 Travelling Tripod Bag



V35P EFP MLS150

Specification

Weight	12.8 kgs/28.2 lbs
Maximum Height	1.76 m/69.3 in
Minimum Height	0.79 m/31.1 in
Transport Length	0.99 m/39 in
Section	2 Stage

System Configuration

V35P Fluid Head
 EFP150/CF2 Two-Stage Carbon Fiber Heavy-Duty EFP Tripod
 Two PB-2 Telescopic Pan Bar (Left & Right)
 MSP-2 Mid Level Spreader & RF-1 Rubber Feet
 SB-3 Travelling Tripod Bag



Optional Accessories



Mid Level Spreader MSP-2



Rubber Feet RF-1



Ground Spreader GS-2



Heavy-Duty Ground Spreader GS-2



Tripod Adapter TA-2



Dolly L