


f=16mm V-DSLR AS UMC II (for Cinema)

SPECIFICATIONS		T2.2 16mm ED AS UMC CS II									
APERTURE RANGE(T-STOP)		T2.2 to T22									
OPTICAL CONSTRUCTION		13 ELEMENTS IN 11 GROUPS (1 GLASS ASP & 1 HYBRID ASP)									
MINIMUM FOCUSING DISTANCE		0.2m(0.66ft)									
FILTER SIZE		Φ77mm									
MAXIMUM DIAMETER		Φ83mm									
MOUNT		NIKON	CANON EOS	PENTAX K	SONY α	CANON M	FUJIFILM X	SAMSUNG NX	SONY E	FOUR-THIRDS	MICRO FOUR-THIRDS
ANGLE OF VIEW	APS-C	83.1°	79.5°	83.1°	83.1°	79.5°	83.1°	83.1°	83.1°	-	-
	FOUR-THIRDS (4/3")	-	-	-	-	-	-	-	-	67.6°	67.6°
LENGTH(LENS MOUNT TO FRONT)		86.9mm	89.4mm	87.9mm	88.9mm	115.3mm	115.7mm	107.9mm	115.4mm	94.73mm	114.2mm
WEIGHT(CAP,HOOD DETACHABLE)		580g	590g	580g	585g	620g	625g	615g	620g	610g	620g
GEAR	MODULE	0.8									
	A	7mm									
	B	4mm									
	C	43.8mm									
	D	8mm	10.5mm	9mm	10mm	36.4mm	36.8mm	29mm	36.5mm	15.8mm	35.3mm
	FOCUS DIAMETER	Φ81.6mm									
APERTURE DIAMETER		Φ70.4mm	Φ73.6mm								

Drawing

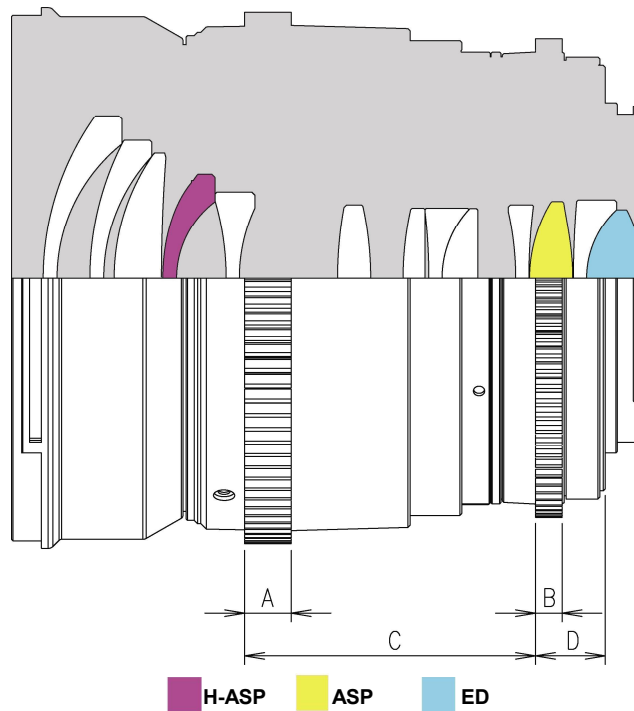

SAMYANG

Samyang Optics R&D Center
Copyright © 2013-0