

 Litepanels®


GEMINI 1X1

SOFT



LIGHT IT
YOUR WAY

Light your scene faster and brighter on location or in the studio with the Gemini 1x1 Soft RGBWW LED panel from Litepanels. Delivering full spectrum, accurate Daylight and Tungsten light with the ability to dial in any color imaginable and a wide selection of lighting effects, the lightweight, quick-to-rig, and easy to control Gemini is the ultimate no-crew lighting solution for image makers on the go.



Perfect light instantly available

Every color at your fingertips.

Total control of light with four lighting modes; CCT Mode for true Daylight and Tungsten with fine tuning; HSI Mode to create any color in the 360° color wheel; Gel Mode to quickly dial up many popular gels, and Effects Mode for a dazzling array of creative lighting effects at your fingertips.



Easily switch between battery and AC

The industry's most agile light on the go.

A Lightweight design for rapid rigging with fewer cables and full-intensity mobile power from XLR, V-Mount or Gold Mount batteries - drawing just 200W - makes Gemini 1x1 Soft the perfect location light.



Instantly accessible and easy to rig

No parts to assemble, Gemini is ready to start work immediately.

Ready to go straight out of the box with no assembly required. Easy to reach, on-board controls and remote-control options via DMX, wireless DMX or Bluetooth for easy integration into your existing lighting set up.



Serious Stability

Flicker Free Light with no color shift.

Flicker-free light at any frame rate or shutter angle and at any intensity level perfect for creating slow motion shots with Ultra-smooth dimming from 100 to 0.1%.

GEMINI SPECS

- Voltage Range:** 100-240VAC, 13-28VDC
- Power Consumption:** 200W (nominal)
- LED Technology:** RGBWW
- Color Temperature:** 2700-10000K
- Lighting Intensity:** 3.2k @ 10ft / 3m = 557 LUX, 5.6k @ 10ft / 3m = 614 LUX
- CRI / TLCI:** Daylight: 97, Tungsten: 94
- Beam and Field Angle:** 95° / 157°
- Control:** Built-in WIFI, DMX (5 PIN & RJ45), Optional Wireless DMX, Bluetooth, SmartLite Director App
- Color Controls:** Kelvin Temperature, plus/minus green, Hue, Saturation, Intensity, Gel Presets

- Low End Dimming:** From 0.1%
- Battery Powered:** Optional plates available, runs at 90% output on single 14.4V battery, or 100% on 26V or dual 14.4V batteries
- Cooling:** Fan, at 50% output when disabled. Fan delayed start option
- Mount:** 1-1/8" (28mm) pin, Standard Yoke, stackable as 2 & 4 units
- Fixture Dimensions:** 12.6 x 12.6 x 4.6" / 320 x 320 x 119mm
- Weight:** 11.7lbs / 5.31kg

945-1101

Gemini 1x1 Soft Panel-EU

945-1111

Gemini 1x1 Soft Panel-EU w/Pole Op Yoke

945-1201

Gemini 1x1 Soft Panel-UK

945-1211

Gemini 1x1 Soft Panel-UK w/Pole Op Yoke

945-1301

Gemini 1x1 Soft Panel-US

945-1311

Gemini 1x1 Soft Panel-US w/Pole Op Yoke

945-1401

Gemini 1x1 Soft Panel-Bare Ends Power Cable

945-1411

Gemini 1x1 Soft Panel-w/Pole Op Yoke, Bare Ends Power Cable


OPTIONAL ACCESSORIES

- Diffusers - Light, Med, Heavy
- Intensifier
- Honeycomb
- 4-Way Barndoors
- Stacking Kit (2x, 4x)
- Fixture Cover
- Hard Case
- Soft Carry Case
- Snapbag®
- Snapgrid®
- Pole Operated Yoke
- Gold Mount Battery Plate
- V Mount Battery Plate
- Array Kits



PHOTOMETRICS Beam Angle 95° / Field Angle 157°

| DAYLIGHT | Footcandles | LUX |
|------------|-------------|------|
| 3.3ft / 1m | 513 | 5526 |
| 10ft / 3m | 57 | 614 |
| 16ft / 5m | 21 | 221 |
| 33ft / 10m | 5 | 55.3 |
| 49ft / 15m | 2 | 24.6 |

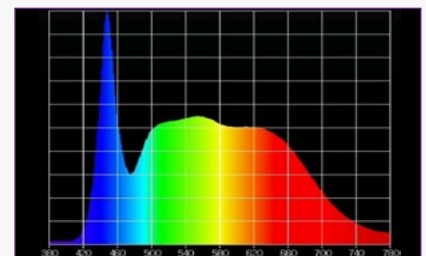

| TUNGSTEN | Footcandles | LUX |
|------------|-------------|------|
| 3.3ft / 1m | 466 | 5012 |
| 10ft / 3m | 52 | 557 |
| 16ft / 5m | 19 | 201 |
| 33ft / 10m | 5 | 50.1 |
| 49ft / 15m | 2 | 22.3 |

